

HSP line - Glass and Dishwashers



HSP 4
HSP 4 A



HSP 3



HSP 5
HSP 50



HSP 550


HSP line - Glass and Dishwashers

Represented By

femac

FEMAC SINGAPORE PTE LTD
12 TAGORE LANE SINGAPORE 787474
TEL: 64547277
EMAIL: info@femac.com.sg

• SALES • SERVICE • SPARE PARTS •

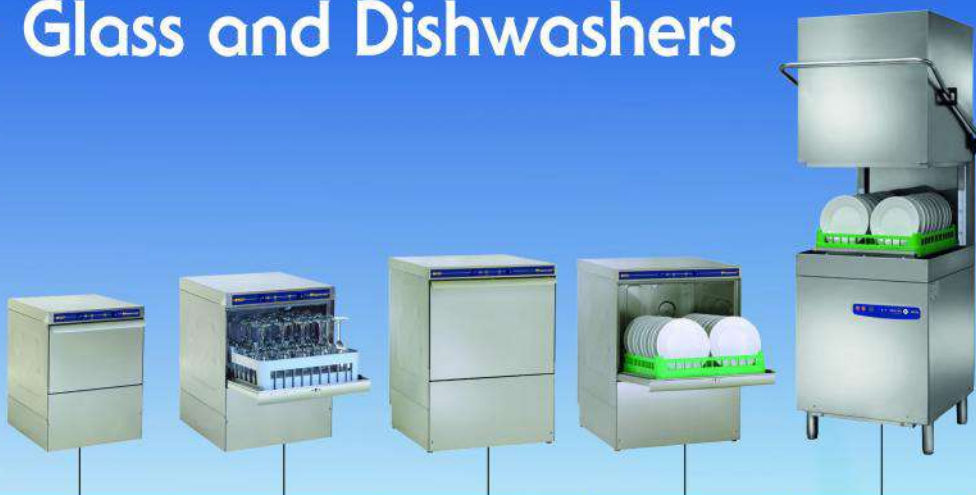

Model	HSP 3	HSP 4 HSP 4 A	HSP 5	HSP 50	HSP 550
Dimensions mm	430 x 521 x 620 h	460 x 521 x 620 h	600 x 600 x 820 h	600 x 600 x 820 h	625 x 740 x 1470 h
Dimensions mm HSP 4 A		460 x 521 x 680 h			
Structure	Single wall	Single wall	Single wall	Single wall	Single wall
Tank	Self-cleaning	Self-cleaning	Self-cleaning	Self-cleaning	Self-cleaning
Rinse aid dispenser	Yes	Yes	Yes	Yes	Yes
Detergent pump	Optional	Optional	Optional	Optional	Optional
Rack size mm	350x350 - dia. Ø 350	400x400 - dia. Ø 400	500x500	500x500	500x500
Rack output hour	30	30	20	20	30 - 20 - 15
Door clearance mm	220	220	330	330	420
Door clearance mm HSP 4 A		280			
Cycle (seconds)	120 s	120 s	180 s	180 s	120 - 180 - 240 s
Water consumption cycle	2 L	2 L	3,5 L	3,5 L	3,5 L
Tank capacity	12,5	12,5	20 L	20 L	42 L
Boiler capacity	4 L	4 L	7,5 L	7,5 L	8,2 L
Boiler heating element	2800 W	2800 W	3000 W	4000 W	6000 W
Tank heating element	2000 W	2000 W	2000 W	2000 W	4000 W
Wash pump	350 W	350 W	550 W	550 W	750 W
Total power	3150 W	3150 W	3550 W	4550 W	6750 W
Electric supply	230V/1/50Hz	230V/1/50Hz	230V/1/50Hz	400V/3N/50HZ	400V/3N/50HZ
Outlet house connection	Ø 28 mm	Ø 28 mm	Ø 31 mm	Ø 31 mm	Ø 1" G
Inlet hose connection	2÷4 bar Ø 3/4 "G	2÷4 bar Ø 3/4 "G	2÷4 bar Ø 3/4 "G	2÷4 bar Ø 3/4 "G	2÷4 bar Ø 3/4 "G
Wash temperature	50°÷60°	50°÷60°	50°÷60°	50°÷60°	50°÷60°
Rinse temperature	80°÷90°	80°÷90°	80°÷90°	80°÷90°	80°÷90°
Noise level	< 70 db (A)	< 70 db (A)	< 70 db (A)	< 70 db (A)	< 70 db (A)
Water inlet temperature	50° C	50° C	50° C	50° C	50° C
Water hardness	4° - 10 F (french degrees)				

The manufacturer reserves the right to change specifications without notice.