



GRAM GASTRO 07

Building blocks in the 1/1 GN counter series

Standard specification and accessories

GRAM GASTRO 07 can be used as an island sitting or be placed against a wall – and if necessary under an existing worktop.

The counter series is available with 2, 3 or 4 refrigerated sections. Inside and outside surfaces are made of stainless steel. The height of the counter is 850-1000 mm depending on the chosen legs/castors. The worktop depth is 700 mm.

Starting from a standard cabinet, the table below shows all available equipment options at a glance.




GRAM GASTRO 07 Refrigerated Counters

		Code	1407 CS	1807 CS	2207 CS
✓ Standard Model					
● As standard	Footprint (BxD), mm		1289x700	1726x700	2163x700
○ Optimal Equipment	Height, mm		885/950	885/950	885/950
Temperature range	Refrigeration, +2/+12°C	K	✓	✓	✓
	Medium, -5/+12°C	M	✓	✓	✓
	Freezing, -25/-5°C	F	✓	✓	✓
Materials	External		Stainless	Stainless	Stainless
	Interior		Stainless	Stainless	Stainless
Equipped with	Number of doors / sections		2	3	4
	Number of stainless shelves (325x530 mm)		4	6	8

Exterior Equipment		A			
	Flat worktop	A	●	●	●
	Flat worktop with 50 mm splashback	A5	○	○	○
	Flat worktop with 100 mm splashback	A1	○	○	○
	Insulating board - without worktop	B	○	○	○
	Saladette worktop	S	○	○	○
	Saladette worktop with 50 mm splashback	S5	○	○	○
	Insulated hinged night lid for saladette	-L	○	○	○
	Rack with 2 shelves	O	○	○	○
	Perspex night lid for saladette	-PL	○	○	○
	Door sections (right / left hand hinged)	DR/DL	●	●	●
	Drawer section with 2 x 1/2 drawer	2D	○	○	○
	Drawer section with 3 x 1/3 drawer	3D	○	○	○
	Locks	LC	○	○	○
	Legs (H = 135/200 mm)	L2	●	●	●
	Castors (H = 127 mm)	C1	○	○	○
	Cabinet prepared for plinth mounting	P	○	○	○
	Electric elevation (H = 850/1050 mm)	V	○	○	○
Interior Equipment	Built-in datalogger	L	○	○	○
	Additional stainless shelves		○	○	○
	Grey wirebaskets (2 of) instead of shelf		○	○	○
Refrigeration	R 290	CSG	●	●	●
	R 134 a	CSH	○	○	○
	R 404 A	CSH	○	○	○
	Remote	CSF	○	○	○
	Brine cooling	CSS	○	○	○



Technical data



1407 CS




1807 CS



2207 CS

		1407 CS			1807 CS			2207 CS		
		K	M	F	K	M	F	K	M	F
Temperature range	°C	+2/+12°	-5/+12°	-25/-5°	+2/+12°	-5/+12°	-25/-5°	+2/+12°	-5/+12°	-25/-5°
Refrigeration capacity at -10°C	Watt	345			345			345		
Refrigeration capacity at -25°C	Watt	550			550			640		
Electrical connection	V/Hz	230/50								
Connection load	Watt	279	343	382	279	350	483	279	356	489
Amperage	A	1,8	2	2,4	1,8	2,1	2,5	1,8	2,1	2,5
Climate class		5								
Volume, gross	l	347			509			670		
Weight, gross	Kg	142			179			216		

Gram reserves the right to alter specifications without notice as a result of product development.

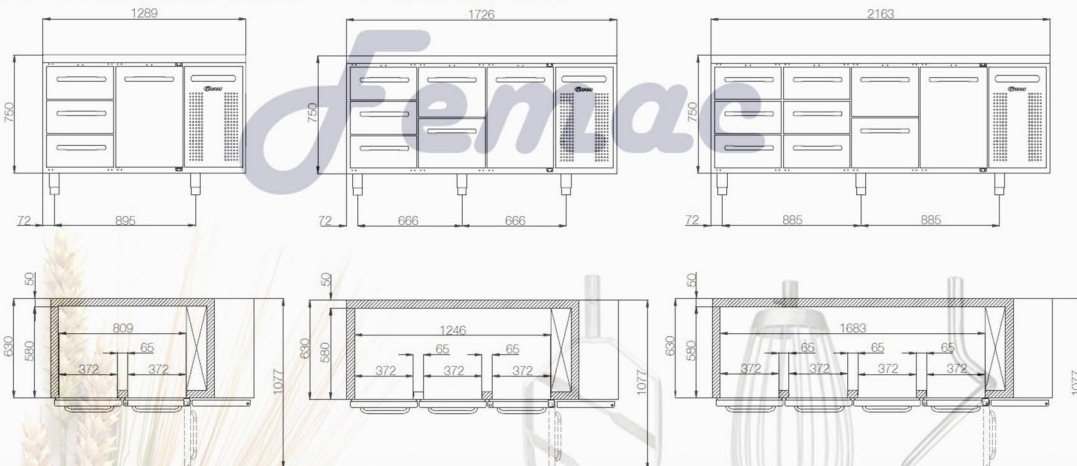

SALADETTE CUT OUT SIZES

