

# MIXER

ART OF MIXING

## ASM EVO


### SPIRAL MIXER WITH FIXED

#### STANDARD FEATURES

- Painted steel structure raised from the ground on 4 adjustable feet.
- Bowl, spiral, contrast column and guard made in stainless steel.
- Two independent 2-speed motors for spiral and bowl.
- Movement is transmitted by pulleys and V-belts.
- Bowl thrust roller.
- Frontal control with two timers.
- Setting of work time with automatic shift from 1st to 2nd speed.
- Selector to reverse bowl.
- Impulse button to rotate bowl for product removal.
- Selector to activate second bowl speed.

#### CAPACITY (kg)

- 60 •80 •100 •130 •160
- 200 •250

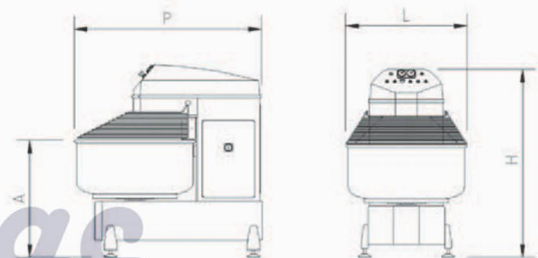

#### TECHNICAL DATA

| MODEL                                 |      | ASM EVO 60 | ASM EVO 80 | ASM EVO 100 | ASM EVO 130 | ASM EVO 160 | ASM EVO 200 | ASM EVO 250 |
|---------------------------------------|------|------------|------------|-------------|-------------|-------------|-------------|-------------|
| Dough capacity (min./max) *           | kg   | 5/60       | 8/80       | 8/100       | 10/130      | 10/160      | 10/200      | 15/250      |
| Flour capacity (min./max) *           | kg   | 3/38       | 5/50       | 5/62        | 6/80        | 6/100       | 6/125       | 9/150       |
| Water capacity (min./max) *           | lt   | 2/22       | 3/30       | 3/38        | 4/50        | 4/60        | 4/75        | 6/100       |
| Bowl volume                           | lt   | 100        | 135        | 155         | 205         | 260         | 285         | 380         |
| % water/flour minimum                 | %    | 50         | 50         | 50          | 50          | 50          | 50          | 50          |
| Spiral turns 1st /2nd speed (50/60hz) | rpm  | 93/184     | 98/194     | 98/194      | 98/194      | 92/182      | 92/182      | 92/183      |
| Bowl turns 1st / 2nd speed (50/60Hz)  | rpm  | 10.5/21    | 10/20      | 10/20       | 9.5/19      | 9/18        | 9/18        | 9/18        |
| Motor power 1st speed                 | kw   | 2.35       | 2.9        | 2.9         | 3.6         | 4.6         | 4.6         | 5.4         |
| Motor power 2nd speed                 | kw   | 3.15       | 5.3        | 5.3         | 6.3         | 7.4         | 7.4         | 8.6         |
| Current drawn V 230                   | A    | 12         | 20.5       | 20.5        | 23.5        | 34          | 34          | 34          |
| Current drawn V 400                   | A    | 7.5        | 12         | 12          | 13.5        | 17.5        | 17.5        | 20.5        |
| Spiral bar diameter                   | mm   | 30         | 35         | 35          | 40          | 48          | 48          | 60          |
| Height from bowl edge                 | A mm | 890        | 890        | 890         | 950         | 910         | 940         | 975         |
| Total depth                           | P mm | 1040       | 1190       | 1190        | 1275        | 1460        | 1460        | 1565        |
| Total width                           | L mm | 635        | 745        | 745         | 845         | 945         | 945         | 1045        |
| Total height                          | H mm | 1360       | 1415       | 1415        | 1470        | 1500        | 1500        | 1500        |
| Net weight                            | kg   | 300        | 390        | 395         | 460         | 650         | 650         | 670         |

\*: capacity based on the percentage of liquid/flour = 60%

All data are to be considered as nominal, MIXER srl reserves the right to make any changes to the product and/or technical specifications without notice.