

All The Best

From One Supplier

• SALES • SERVICE • SPARE PARTS •



BAKERTOP MIND.Maps™ ONE COUNTERTOP XEBC-10EU-E1RM



Technologically advanced combi oven for fresh or frozen baking processes and for gastronomy cooking processes (dehydrating, steaming, low temperature baking, sous vide cooking, roasting, grilling, pan frying, regeneration and plated regeneration) thanks to the Unox Intensive Cooking and Intelligence Performance technologies which guarantee perfect results and repeatability for any load size. Automatic management of cooking processes (CHEFUNOX) for perfect results even without a trained staff.

- Combi steamer
- Electric
- 10 trays 600x400
- Hinged left(right hand door)
- 7" Touch control panel

STANDARD COOKING FEATURES Manual cooking

- Temperature: 30 °C 260 °C
- Up to 9 cooking steps
- CLIMA.Control: humidity or dry air set by 10%
- Delta T cooking with core probe

Programs

- 1000+ programs
- MIND.Maps™: draw the cooking processes directly on the display

STANDARD TECHNICAL FEATURES

- ROTOR.Klean[™]: automatic washing system
- Cooking chamber in high-resistance AISI 304 stainless steel with rounded edges
- Double glass
- Cooking chamber lighting through LED lights embedded in the door
- Tray supports with anti-tipping system
- Drip collection system integrated in the door and functional even with the door open
- 4-speed fan system and high-performance circular resistance
- Integrated DET&Rinse™ detergent container length Specialist
- Wi-Fi / USB data: download/upload HACCP data
- Wi-Fi / USB data: download/upload programs

ADVANCED AND AUTOMATIC COOKING FEATURES

Unox Intensive Cooking

- DRY.Maxi™: rapidly extracts the humidity from the cooking chamber
- STEAM.Maxi™: produces saturated steam
- AIR.Maxi™: manage fans auto-reverse and pulse function
- CLIMALUX™: total control of the humidity in the cooking chamber

Data Driven Cooking

 Control and monitor the operating conditions of your ovens in real-time, create and share new recipes. The AI transforms the consumption data into useful information in order to increase your daily profit. Create, understand, improve

APP & WEB SERVICES

- Data Driven Cooking app & webapp
- Top Training app
- Combi guru App

12 Tagore Lane Singapore 787474 Tel: +65 64547277 Fax: +65 64587701 Email: info@femac.com.sg





All The Best


From One Supplier

• SALES • SERVICE • SPARE PARTS •





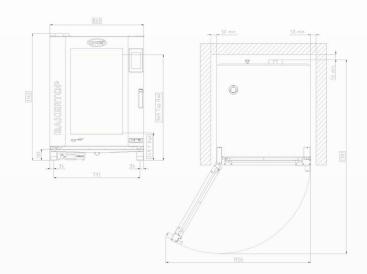



CONNECTION POSITIONS

2 Terminal board power supply

3 Unipotential terminal

6 Technical data plate

7 Safety thermostat

8 3/4" Thread water inlet

10 Rotor.KLEAN™ connection

11 Cavity drain pipe

12 Hot fumes exhaust chimney

13 Accessories connection

27 Cooling air outlet

Voltage **Phase Frequency Total power Maximum Amp Draw** Required breaker size* Power cable requirement

380-415 V 3PH+N+PE 50-60 Hz 14,9 kW 22 A 32 A

Width Depth Height **Net Weight** Pan spacing **Cord diameter** H07RN-F 5G 4 mm²

860 mm 967 mm 1163 mm 136 kg 80 mm 16.25 mm