




The Bakery Equipment Specialist

Proofer / Retarder F-Series F200

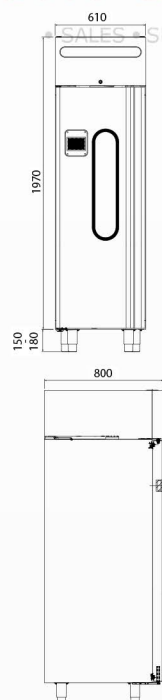

From One Supplier

SALES • SERVICE • SPARE PARTS •

TECHNICAL SPECIFICATIONS



HIK = Refrigerator and proofer for cooling and proofing.

Cooling temperature range	-9 °C to +40 °C
Proofing temperature range	Room temperature to +40 °C
Cooling refrigerant	R290
Tray size [mm]	400 x 600, 450 x 600, 460 x 610
Distance between girders [mm]	82
Total trays	14
Recommended fuse (amps)	10 A
Power	1.5 kW
Voltage	230 V
Water supply	G3/4
Weight	110 kg

1. Outstanding proofing

Fan system and pressure side designed to provide optimal airflow.

2. Long, reliable operation

Compact design with heavy-duty insulation and stainless steel construction. High-quality materials keep the hot air out and the cold air in when cooling. Heat is retained during proofing.

3. Maintenance-free and easy to clean

Automatic defrosting. Clean design with rounded corners. No unnecessary frames or joints.

4. Automatic or manual proofing program

Automatic or manual program adjustment for the cooling and proofing process.

5. Control panel

User-friendly control panel with touch screen and clear user interface that is easy to learn. Pre-programmed or manual control of cooling and proofing.

6. Ergonomic design

Ergonomically placed control panel. Door with a sturdy, integrated handle and magnetic sealing strip, making it easy to open and close.

7. Clear overview

Door with large double glazing and vertical LED lights inside. Provides a clear overview of the proofing process on the trays.

8. Less waste water

A high-quality steam generator reduces the amount of waste water during the proofing process and makes the product more environmentally friendly.

9. No drain pipe required

Collection tray under the cabinet with automatic evaporation.

10. Acoustic signal

An acoustic signal sounds an alarm if a fault occurs and when the proofing program is complete.

11. Refrigeration compressor

High quality refrigeration compressor. Refrigerant R290.

12. Adjustable legs

Stainless steel legs, adjustable 150–180 mm.

OPTIONS

Right-hinged door.